





Technical Information



Inner bore <i>d</i> mm	Bearing number		Principal dimensions			Basic load ratings		Max runout speed		Weight kg
	cylindrical bore	tapered bore	<i>D</i>	<i>W</i> mm	<i>r</i>	dynamic <i>C</i> N	static <i>C</i> ₀	grease oil	r/min	
12	1301		37	12	1.0	7400	1700	12600	15400	0.067
15	1302		42	13	1.0	8600	2000	11900	14000	0.094
17	1303		47	14	1.0	10100	2700	9800	11900	0.130
20	1304	1304 K	52	15	1.1	11400	3200	8400	10500	0.160
25	1305	1305 K	62	17	1.1	15200	4300	6600	8400	0.260
30	1306	1306 K	72	19	1.1	18000	5400	6300	7700	0.390
35	1307	1307 K	80	21	1.5	21200	6800	5200	6300	0.510
40	1308	1308 K	90	23	1.5	27000	8900	4600	5600	0.720
45	1309	1309 K	100	25	1.5	31200	10700	4400	5200	0.960
50	1310	1310 K	110	27	2.0	34800	11200	3900	4600	1.200
55	1311	1311 K	120	29	2.0	40500	14400	3500	4200	1.600
60	1312	1312 K	130	31	2.0	46800	17600	3100	3700	1.950
65	1313	1313 K	140	33	2.0	52000	20400	3000	3500	2.450
70	1314		150	35	2.1	59200	22000	2800	3300	3.000
75	1315	1315 K	160	37	2.1	63400	24000	2600	3100	3.550
80	1316	1316 K	170	39	2.1	70700	26800	2500	3000	4.200
85	1317	1317 K	180	41	3.0	78000	30400	2300	2800	5.000
90	1318	1318 K	190	43	3.0	93600	35200	2200	2600	5.800

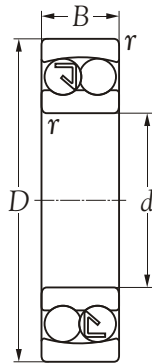