


Technical Information



Inner bore F_w mm	Bearing number	Principal dimensions			Limiting speeds ¹⁾ n N _{x2}) min ⁻¹		Transmissible torque Md Nm	Suitable drawn cup bearing for radial support ³⁾	Mass g
		D	C -0.25 mm	r_s min					
4	HF 0406*	8	6	0.3	23800	9800	0.34	HK 0408 TN	1.0
6	HF 0612	10	12	0.3	16100	9100	1.76	HK 0608	2.0
8	HF 0812	12	12	0.3	11900	8400	3.15	HK 0808	3.5
10	HF 1012	14	12	0.3	9800	7700	5.30	HK 1010	4.0
12	HF 1216	18	16	0.3	7700	5600	12.20	HK 1212	11.6
14	HF 1416	20	16	0.3	6600	5600	17.30	HK 1412	13.0
16	HF 1616	22	16	0.3	5900	5200	20.50	HK 1612	14.0
18	HF 1816	24	16	0.3	5200	5200	24.10	HK 1812	15.5
20	HF 2016	26	16	0.3	4900	4500	28.50	HK 2010	17.0
25	HF 2520	32	20	0.3	3800	3800	66.00	HK 2512	30.9
30	HF 3020	37	20	0.3	3100	3100	90.00	HK 3012	36.0
35	HF 3520	42	20	0.3	2700	2700	121.00	HK 3512	40.0

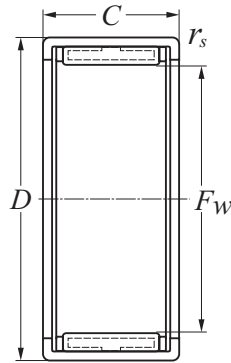