


Technical Information

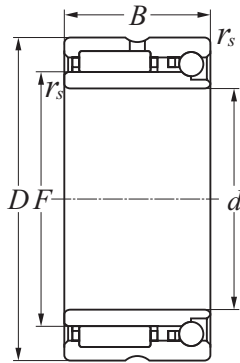

Inner bore <i>d</i> mm	Bearing number	Principal dimensions				dynamic radial C	Basic load ratings			Limiting speed $n_{1grease}$ min ⁻¹	Mass g
		<i>F</i>	<i>D</i>	<i>B</i>	<i>r_s</i> mm		static Co	dynamic C	axial static Co		
12	NKIA 5901	16	24	16	0.3	6000	6600	1700	1500	16100	40
15	NKIA 5902	20	28	18	0.3	8700	10800	1800	1800	14700	50
17	NKIA 5903	22	30	18	0.3	8800	11600	2000	2200	14000	56
20	NKIA 5904	25	37	23	0.3	16800	20400	3100	3300	11900	103
22	NKIA 59/22	28	39	23	0.3	18200	23600	3400	3800	10500	118
25	NKIA 5905	30	42	23	0.3	18800	25200	3400	4100	9800	130
30	NKIA 5906	35	47	23	0.3	20000	28400	3800	5000	9100	147
35	NKIA 5907	42	55	27	0.6	25200	40000	4800	6700	7700	243
40	NKIA 5908	48	62	30	0.6	34400	53600	5900	8700	6300	315
45	NKIA 5909 X	52	68	30	0.6	36000	58400	6100	9600	5900	375
50	NKIA 5910 X	58	72	30	0.6	37600	64000	6400	10900	5600	380
55	NKIA 5911	63	80	34	1.0	46400	80000	7700	13200	4900	550
60	NKIA 5912	68	85	34	1.0	48000	86400	800	14300	4500	590
65	NKIA 5913 X	72	90	34	1.0	48800	89600	8200	15400	4500	635
70	NKIA 5914 X	80	100	40	1.0	67200	124800	10800	20000	3800	980