
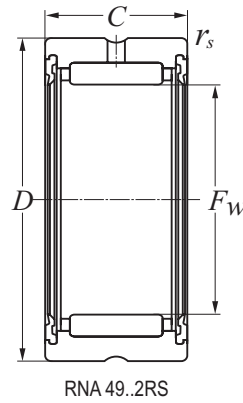


Technical Information

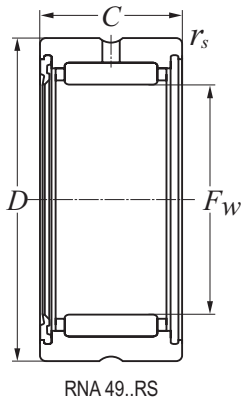

Inner bore F_w mm	Bearing number		Principal dimensions			Basic load ratings		Limiting speed $n_{1grease}$ min ⁻¹	Mass g
	Sealed on one side	Sealed on two sides	D	C mm	r_s mm	dynamic C r/min	static C_0		
16	RNA 4900 RS	RNA 4900 2RS	22	13	0.3	5400	5500	9100	16.0
14	RNA 4901 RS	RNA 4901 2RS	24	13	0.3	6000	6600	8400	18.0
16	RNA 4902 RS	RNA 4902 2RS	28	13	0.3	6800	8200	7000	21.5
20	RNA 4903 RS	RNA 4903 2RS	30	13	0.3	7000	8800	6300	23.0
25	RNA 4904 RS	RNA 4904 2RS	37	17	0.3	13800	15900	5200	56.0
30	RNA 4905 RS	RNA 4905 2RS	42	17	0.3	15400	19300	4500	60.0
35	RNA 4906 RS	RNA 4906 2RS	47	17	0.3	16800	22800	3800	69.0
42	RNA 4907 RS	RNA 4907 2RS	55	20	0.6	21200	31600	3300	107.0
48	RNA 4908 RS	RNA 4908 2RS	62	22	0.6	28800	42400	2900	154.0
52	RNA 4909 RS	RNA 4909 2RS	68	22	0.6	30400	47200	2700	157.0
58	RNA 4910 RS	RNA 4910 2RS	72	22	0.6	32000	51200	2400	160.0