



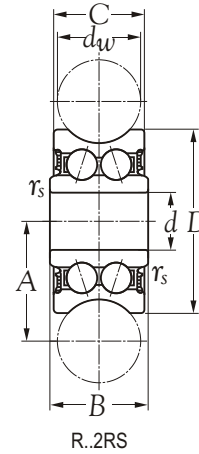

Technical Information

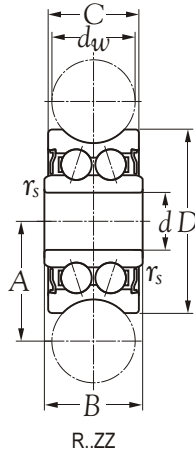

Inner bore <i>d</i> mm	Bearing number		Principal dimensions						Load ratings				Mass kg
			<i>d_w</i>	<i>D</i>	<i>C</i>	<i>B</i>	<i>A</i>	<i>r_s</i>	<i>C_w</i>	<i>C_{ow}</i>	<i>F_{r perm}</i>	<i>F_{or perm}</i>	
			mm						N				
4	R 50/4-4 ZZ	R 50/4-4 2RS	4	13.0	6.0	7.0	7.55	0.2	1.05	850.00	1.15	1.60	0.007
5	R 50/5-4 ZZ	R 50/5-4 2RS	4	16.0	7.0	8.0	9.00	0.2	1.20	860.00	1.30	1.78	0.009
5	R 50/5-6 ZZ	R 50/5-6 2RS	6	17.0	7.0	8.0	10.50	0.2	1.27	820.00	1.30	1.78	0.010
8	R 50/8-6 ZZ	R 50/8-6 2RS	6	24.0	11.0	11.0	14.00	0.3	3.67	2.28	1.30	4.56	0.020
12	R 5201-10 ZZ	R 5201-10 2RS	10	35.0	15.9	15.9	20.65	0.3	8.50	5.10	5.10	10.20	0.080
12	R 5301-10 ZZ	R 5301-10 2RS	10	42.0	19.0	19.0	24.00	0.6	13.00	7.70	7.50	14.20	0.100
15	R 5302-10 ZZ	R 5302-10 2RS	10	47.0	19.0	19.0	26.65	1.0	16.20	9.20	6.20	18.40	0.170
12	R 5201-12 ZZ	R 5201-12 2RS	12	35.0	15.9	15.9	21.75	0.3	8.40	5.00	5.10	10.00	0.085
12	R 5201-14 ZZ	R 5201-14 2RS	14	39.9	18.0	20.0	24.00	0.3	8.90	5.00	6.70	12.10	0.095
20	R 5204-16 ZZ*	R 5204-16 2RS*	16	52.0	20.6	22.6	31.50	0.6	16.80	9.50	12.10	16.60	0.230
25	R 5206-20 ZZ*	R 5206-20 2RS*	20	72.0	23.8	25.8	41.00	0.6	29.50	16.60	20.70	33.20	0.250
25	R 5206-25 ZZ*	R 5206-25 2RS*	25	72.0	23.8	25.8	43.50	0.6	29.20	16.40	23.10	32.80	0.250
30	R 5207-30 ZZ*	R 5207-30 2RS*	30	80.0	27.0	29.0	51.00	1.0	38.00	20.80	21.40	36.20	0.660
40	R 5208-40 ZZ*	R 5208-40 2RS*	40	98.0	36.0	38.0	62.50	1.0	54.80	29.00	55.00	58.00	1.360
40	R 5308-50 ZZ*	R 5308-50 2RS*	50	110.0	44.0	46.0	72.50	1.1	53.00	39.50	69.00	79.00	1.400

* Standard with lubrication hole on inner ring