




Technical Information

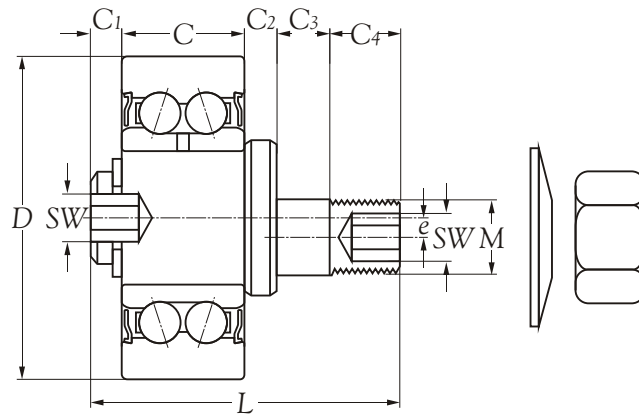

Roller designation with integral stud	Principal dimensions										Load ratings				Mass kg
	D	C	L	C <sub>1</sub>	C <sub>2</sub>	C <sub>3</sub>	C <sub>4</sub>	e	SW	M	C <sub>w</sub>	C <sub>ow</sub>	F <sub>r perm</sub>	F <sub>or perm</sub>	
	mm										N				
RA 35A	35	15.9	42	2.1	5	6.0	13	1.0	5	M12	8.10	4.9	4.9	9.7	0.150
RA 52A	52	22.2	57	3.3	8	9.5	14	1.5	6	M16	16.00	9.1	11.5	15.8	0.345

\* Track rollers with integral studs are supplied with split washer and nut.

\* The unit contamination protection is provided by side shields **zz**.

