





Technical Information

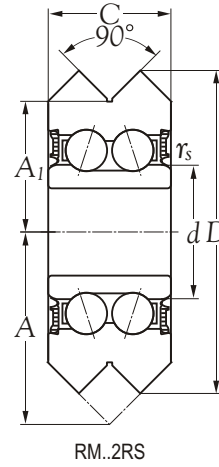

Inner bore <i>d</i> mm	Bearing number		Principal dimensions					Load ratings				Mass kg
			<i>D</i>	<i>C</i>	<i>A₁</i> mm	<i>A</i>	<i>r_s</i>	<i>C_w</i>	<i>C_{ow}</i>	<i>F_{r perm}</i> N	<i>F_{or perm}</i>	
4.763	RM 1 ZZ	RM 1 2RS	19.56	11.86	7.87	7.93	0.3	1.65	1.14	4.15	7.5	0.012
9.525	RM 2 ZZ	RM 2 2RS	30.73	18.24	11.10	12.70	0.3	8.26	2.65	6.50	11.7	0.040
11.999	RM 3 ZZ	RM 3 2RS	45.72	26.98	15.88	19.05	0.6	5.53	5.20	31.00	55.0	0.136
15.001	RM 4 ZZ	RM 4 2RS	59.94	34.93	19.05	25.40	1.0	16.25	9.20	39.50	72.0	0.285

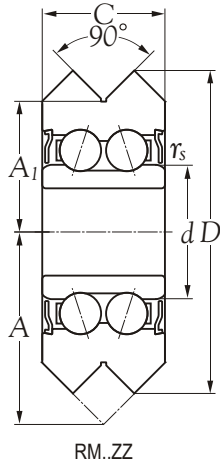