




Technical Information

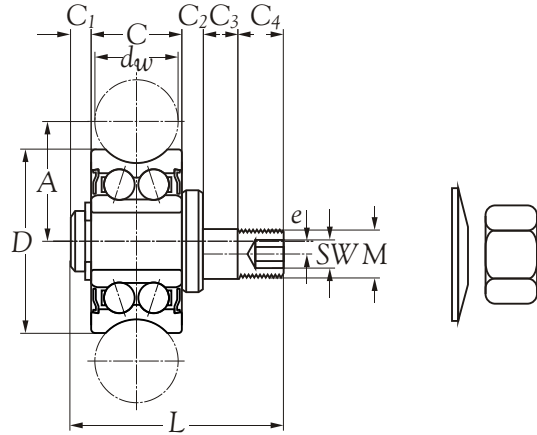

Roller designation with integral stud		Principal dimensions												Load ratings				Mass
concentric	eccentric	$d_w$	$D$	$C$	$A$	$L$	$C_1$	$C_2$	$C_3$	$C_4$	$e$	SW	$M$	$C_w$	$C_{ow}$	$F_{r\ per m}$	$F_{or\ per m}$	kg
		mm												N				
RPC 17	RPE 17	6	17	7.0	10.50	23	1.5	1.5	5	5.5	0.50	2.5	M5	1.25	850.0	1.25	1.70	0.015
RPC 24	RPE 24	6	24	11.0	14.00	29	3.0	2.0	6	7.0	0.50	4.0	M8	3.50	2.2	1.25	4.35	0.042
RPC 35	RPE 35	10	35	15.9	20.65	44	3.2	2.0	10	13.0	0.75	5.0	M10	8.10	8.1	4.90	9.70	0.120

\* Track rollers with integral studs are supplied with split washer and nut.

