




Technical Information

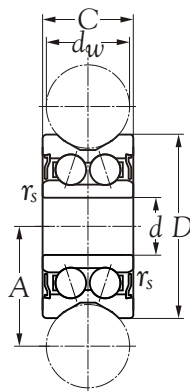

Inner bore <i>d</i> mm	Bearing number	Principal dimensions					Load ratings				Mass kg
		<i>d_w</i>	<i>D</i>	<i>C</i> mm	<i>A</i>	<i>r_s</i>	<i>C_w</i>	<i>C_{ow}</i>	<i>F_{r perm}</i> N	<i>F_{or perm}</i>	
7	RV 20/7-10	10	22	11	14.50	0.3	2.45	1.62	2.35	4.15	0.017
8	RV 20/8-10	10	30	14	18.10	0.3	4.49	2.70	11.00	19.80	0.062
15	RV 202/15.38-10	10	38	17	22.25	0.5	7.29	4.55	10.20	17.90	0.086
15	RV 20/15.40-10	10	40	18	22.00	0.5	7.95	4.95	14.50	26.50	0.110
12	RV 201/12-20	20	41	20	28.00	0.3	8.18	5.10	17.20	31.50	0.130
15	RV 202/15.41-20	20	41	20	28.00	0.5	8.18	5.10	17.20	31.50	0.120
17	RV 203/17	20	58	25	35.00	0.5	16.58	9.20	47.00	86.00	0.325
20	RV 204/20.57-30	30	57	22	41.00	0.6	16.91	9.20	47.00	86.00	0.290
20	RV 204/20.58-30	30	58	25	41.00	0.6	16.79	9.20	40.00	72.00	0.310

* The unit contamination protection is provided by side shields **zz**.

