




Technical Information

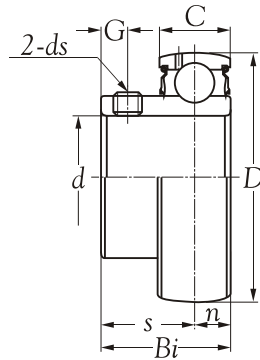

Shaft dia. mm inch	Bearing number	Nominal dimensions								Basic load ratings		Weight Kg
		mm		inch		N		dynamic	static			
		d	D	Bi	C	n	s	G	ds	Cr	Cor	
12 1/2	SB 201 SB 201-8	12 0.5000	40 1.5748	22 0.8661	12 0.4724	6.0 0.2362	16.0 0.6299	4.0 0.1575	M 5X0.8 10#-32 UNF	9,600	4,600	0.10 0.10
15 9/16 5/8	SB 202 SB 202-9 SB 202-10	15 0.5625 0.6250	40 1.5748	22 0.8661	12 0.4724	6.0 0.2362	16.0 0.6299	4.0 0.1575	M 5X0.8 10#-32 UNF	9,600	4,600	0.09 0.09 0.09
17 11/16	SB 203 SB 203-11	17 0.6875	40 1.5748	22 0.8661	12 0.4724	6.0 0.2362	16.0 0.6299	4.0 0.1575	M 5X0.8 10#-32 UNF	9,600	4,600	0.08 0.08
20 3/4	SB 204 SB 204-12	20 0.7500	47 1.8504	25 0.9843	14 0.5512	7.0 0.2756	18.0 0.7087	5.0 0.1969	M 6X1 1/4-28 UNF	12,800	6,650	0.13 0.15
25 13/16 7/8 15/16 1	SB 205 SB 205-13 SB 205-14 SB 205-15 SB 205-16	25 0.8125 0.8750 0.9375 1.0000	52 2.0472	27 1.0630	15 0.5906	7.5 0.2953	19.5 0.7677	5.5 0.2165	M 6X1 1/4-28 UNF	14,000	7,850	0.17 0.20 0.19 0.18 0.16
30 1-1/16 1-1/8 1-3/16 1-1/4	SB 206 SB 206-17 SB 206-18 SB 206-19 SB 206-20	30 1.0625 1.1250 1.1875 1.2500	62 2.4409	29 1.1417	16 0.6299	8.0 0.3150	21.0 0.8268	6.0 0.2362	M 6X1 1/4-28 UNF	19,500	11,300	0.26 0.28 0.27 0.25 0.24
35 1-1/4 1-5/16 1-3/8 1-7/16	SB 207 SB 207-20 SB 207-21 SB 207-22 SB 207-23	35 1.2500 1.3125 1.3750 1.4375	72 2.8346	32 1.2598	17 0.6693	8.5 0.3346	23.5 0.9252	6.5 0.2559	M 6X1 1/4-28 UNF	25,700	15,300	0.38 0.43 0.42 0.41 0.37
40 1-1/2 1-9/16	SB 208 SB 208-24 SB 208-25	40 1.5000 1.5625	80 3.1496	34 1.3386	19 0.7480	9.5 0.3740	24.5 0.9646	7.0 0.2756	M 8X1 5/16-24 UNF	29,100	17,800	0.50 0.54 0.51