





Technical Information



Inner bore d mm	Bearing number	Principal dimensions		Basic load ratings		Max runout speed		Mass kg
		D mm	B mm	dynamic C N	static C_0	grease r/min	oil r/min	
35	NUP 407	100	25	61200	55600	4600	5600	1.05
40	NUP 408	110	27	77440	72000	4200	4900	1.35
45	NUP 409	120	29	84800	81600	3900	4600	1.70
55	NUP 411	140	33	113600	112000	3300	3900	2.60
60	NUP 412	150	35	134400	138400	3000	3500	3.15

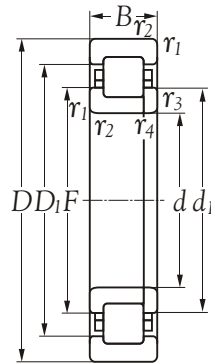

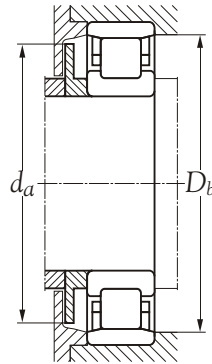

Inner bore d mm	Bearing number	Dimensions (mm)					Abutment and fillet Dimensions (mm)				
		d_1	D_1	F	$r_{1,2}$ min	$r_{3,4}$ min	d_a min	d_b max	D_a max	r_a max	r_b max
35	NUP 407	59.0	76.1	53.0	1.5	1.5	43	61	92	1.5	1.5
40	NUP 408	64.8	84.2	58.0	2.0	2.0	49	67	101	2.0	2.0
45	NUP 409	71.8	92.2	64.5	2.0	2.0	54	74	111	2.0	2.0
55	NUP 411	85.2	108.0	77.2	2.1	2.1	66	88	129	2.0	2.0
60	NUP 412	91.8	117.0	83.0	2.1	2.1	71	94	139	2.0	2.0

